

WINNARD

Product News

NEW MATERIAL OPTION

Ductile Iron DIN1693 GGG-50 (BS2789 450/10) Min. tensile strength 450 Mpa

Helps reduce heat cracking and improves tensile strength.

SAU1030D

OEM cross references

Replaces 4079001000, 4079001001, 4079001002, 4079001003

Applications

SAF Integral 375 x 45

Fitting kit available WA253



SAU1031D

OEM cross references

Replaces 4079001300, 4079001301, 4079001302

Applications


SAF Integral 430 x 45

Fitting kit available WA253



S² MATERIAL RECOMMENDED FOR SAF INTEGRAL

- Heavy duty formulation
- Friction material made in Germany
- Tested in Germany E1 marked

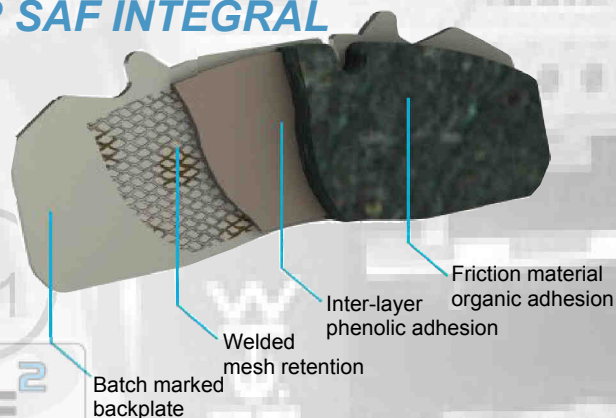

**Winnard
better by design**

Thos. Winnard & Sons Ltd

Mangham Road Rotherham South Yorkshire England S62 6EF
Telephone +44 (0)1709 712000 Export Sales +44 (0)1709 712002 Fax +44 (0)1709 712001
www.winnard.co.uk