


DA1043 Fitting Guide

1. Make sure the hub location splines are clean and free of any debris.
2. Coat the splines and disc location slots with copper grease.
3. Slide the brake disc over the hub ensuring that the chamfered leading edge is towards the hub.
4. Place the retaining ring onto the disc and insert the screws through the ring and into the hub.
5. Tighten the retaining bolts to 30+/-2 Nm.

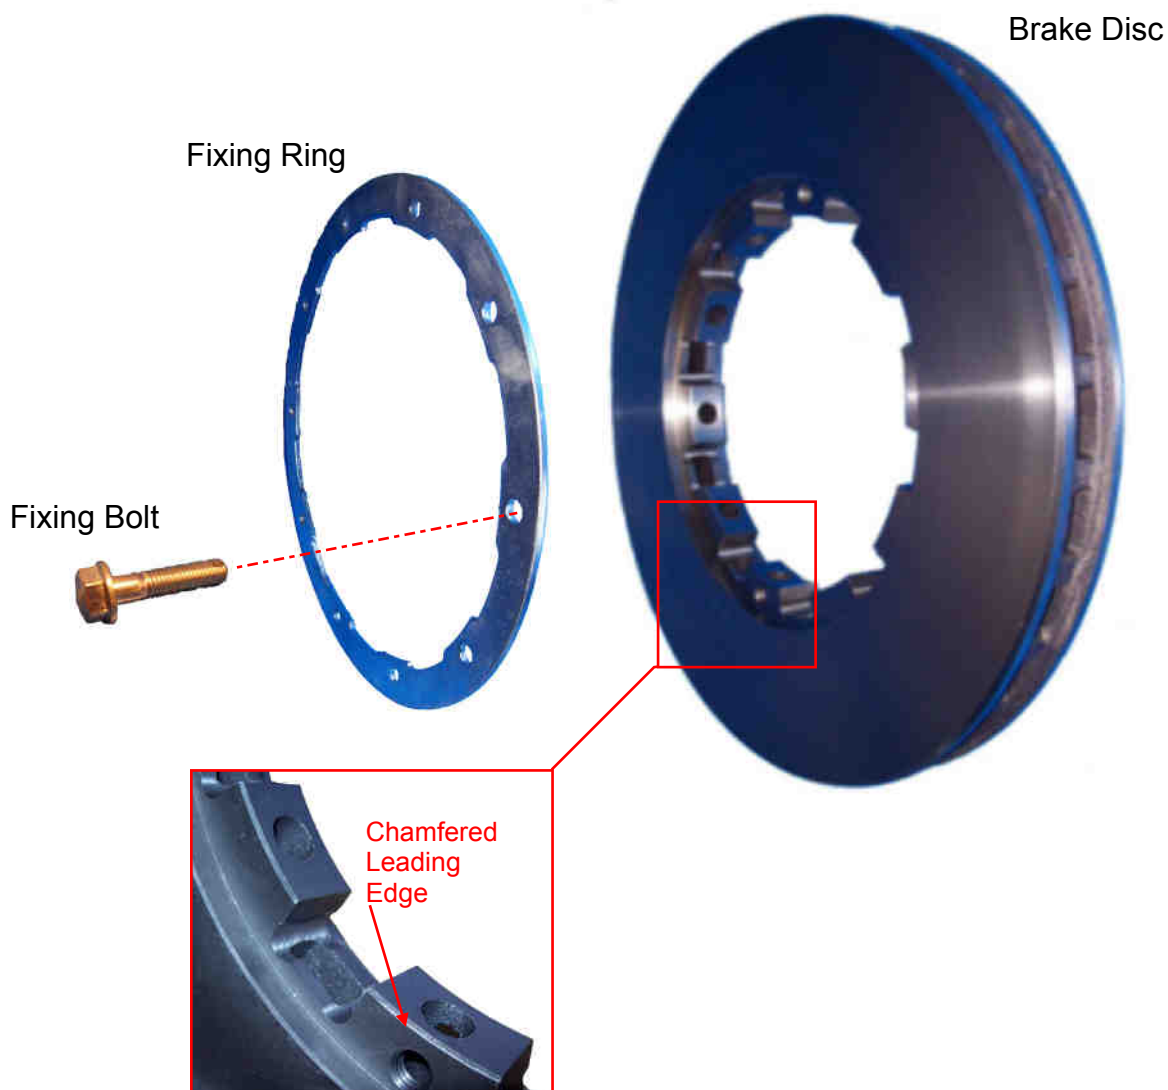

Thos. Winnard & Sons Ltd
Mangham Road, Barbot Hall Ind. Est., Rotherham, S62 6EF
T +44 (0) 1709 712000 F: +44 (0) 1709 712001 E: sales@winnard.co.uk